

[Get a Quote](#)

## Overview

N2K-C2232PP is a Cisco Nexus 2000 Platform Chassis, offering 2 power supply, 1 Fan Modules, 32 x 1/10GE (req SFP/SFP+) + 8 x 10GE (req SFP+), and choice of airflow. Cisco Nexus 2000 Series Fabric Extenders comprise a category of data center products designed to simplify data center access architecture and operations. Nexus 2000 Series Fabric Extenders behave like remote line cards for a parent Cisco Nexus switch. The fabric extenders are essentially extensions of the parent Cisco Nexus switch fabric, with the fabric extenders and the parent switch together forming a distributed modular system. This architecture enables physical topologies with the flexibility and benefits of both top-of-rack (ToR) and end-of-row (EoR) deployments

## Quick Specs

Figure 1 shows the appearance of the N2K-C2232PP.

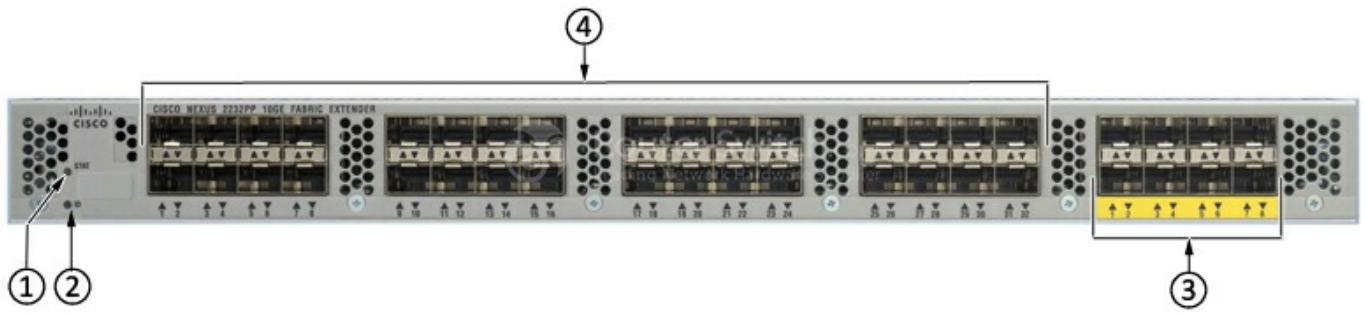


Table 1 shows the Quick Spec.

<b>Product Code</b>	N2K-C2232PP
<b>Fabric extender host interfaces</b>	32
<b>Fabric extender host interface type</b>	1/10 Gigabit Ethernet ports SFP/SFP+ AOC cables: FP-10G-AOC1M, SFP-10G-AOC2M, SFP-10G-AOC3M, SFP-10G-AOC5M, SFP-10G-AOC7M, and SFP-10G-AOC10M
<b>Fabric extender fabric interfaces</b>	8
<b>Fabric speed</b>	80 Gbps in each direction (160-Gbps full duplex)
<b>Performance</b>	Hardware forwarding at 800Gbps or 595 mpps
<b>FCoE</b>	FCoE supported
<b>Cisco parent switch</b>	Cisco Nexus 5000 Series Cisco Nexus 6000 Series Cisco Nexus 7000 Series Cisco Nexus 9000 Series
<b>Dimensions (H x W x D)</b>	4.37 x 43.94 x 44.96 cm
<b>Net Weight</b>	8.33 Kg (Systems are fully loaded with two power supplies and one fan tray.)

## Product Details


Figure 2 shows the front panel of the N2K-C2232PP.



Note:

(1)	Status LED	(3)	8x10GE (req SFP+)
(2)	ID LED	(4)	32 x 1/10 Gigabit Ethernet ports SFP/SFP+

Figure 3 shows the back panel of the N2K-C2232PP.

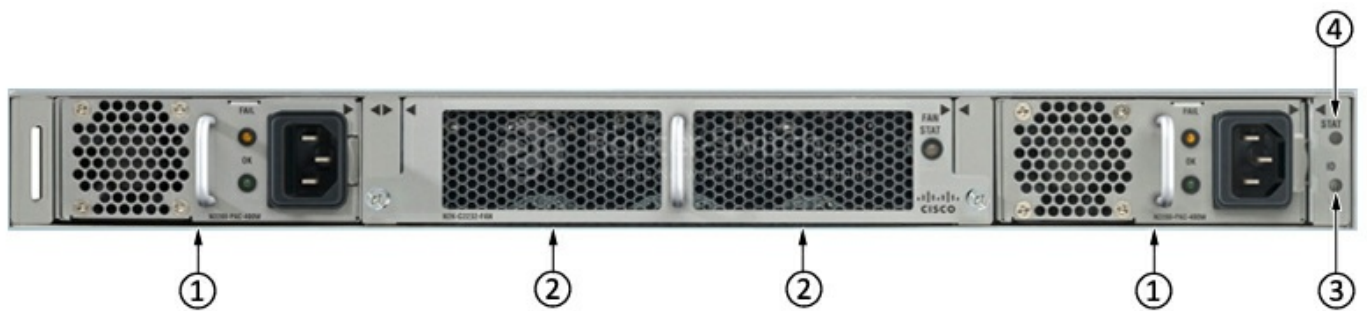

Note:

(1)	Power supply modules (one or two, hot swappable) (AC power supply shown)
(2)	Fan modules (two, hot swappable)
(3)	Status LED
(4)	ID LED

## The Accessories

Table 2 shows some recommended accessories.

Models	Description
<a href="#">SFP-10G-SR</a>	10GBASE-SR SFP Module
<a href="#">SFP-H10GB-CU1M</a>	Cisco Direct-Attach Twinax Copper Cable Assembly with SFP+ Connectors SFP-H10GB-CU1M
<a href="#">SFP-H10GB-CU5M</a>	SFP-H10GB-CU5M,5M Passive Copper Twinax Cable F, Nexus,24AWG cable assembly

## Compare to Similar Items

Table 3 shows the comparison of similar items.

<b>Product Code</b>	<a href="#">N2K-C2348TQ</a>	N2K-C2232PP
<b>Fabric extender host interfaces</b>	48	32
<b>Fabric extender host interface type</b>	48 x 100M/1/10GBASE-T ports: RJ-45 connectors	1/10 Gigabit Ethernet ports SFP/SFP+ AOC cables
<b>Fabric extender fabric interfaces</b>	6 x 40 Gigabit Ethernet QSFP (24 x 10 Gigabit Ethernet)	8
<b>Fabric speed</b>	Up to 240 Gbps in each direction (480-Gbps full duplex)	80 Gbps in each direction (160-Gbps full duplex)
<b>Performance</b>	Hardware forwarding at 1440 Gbps or 2160 mpps	Hardware forwarding at 800Gbps or 595 mpps
<b>Cisco parent switch</b>	Cisco Nexus 5500 and 5600 platforms Cisco Nexus 6000 Series Cisco Nexus 7000 Series and 7700 platform Cisco Nexus 9300 and 9500 Series	Cisco Nexus 5000 Series Cisco Nexus 6000 Series Cisco Nexus 7000 Series Cisco Nexus 9000 Series

## Get more information

Do you have any question about the N2K-C2232PP?

Contact us now via [Live Chat](#) or [sales@router-switch.com](mailto:sales@router-switch.com).

## Specification

<b>N2K-C2232PP Specification</b>	
<b>Type</b>	Cisco Nexus 2232PP
<b>Fabric extender host interfaces</b>	32
<b>Fabric extender host interface type</b>	1/10 Gigabit Ethernet ports SFP/SFP+ (supported transceiver and cables include Twinax SFP-H10GB-CU1M, SFP-H10GB-CU3M, SFP-H10GB-CU5M, SFP-H10GB-ACU7M, and SFP-H10GB-ACU10M; SFP+ SFP-10G-SR, SFP-10G-SR-S, SFP-10G-LR, and SFP-10G-LR-S; and SFP GLC-T, GLC-SX-MM, GLC-LH-SM, SFP-GE-T, SFP-GE-S, and SFP-GE-L) AOC cables: FP-10G-AOC1M, SFP-10G-AOC2M, SFP-10G-AOC3M, SFP-10G-AOC5M, SFP-10G-AOC7M, and SFP-10G-AOC10M
<b>Fabric extender fabric interfaces</b>	8
<b>Fabric extender fabric interface type</b>	Fiber: Cisco Fabric Extender Transceiver (FET-10G) and SFP+ optics (SFP-10G-SR, SFP-10G-SR-S, SFP-10G-LR, and SFP-10G-LR-S) Copper: 10 Gigabit Ethernet SFP+ passive Twinax copper cables (SFP-H10GB-CU1M, SFP-H10GB-CU3M, and SFP-H10GB-CU5M) and active Twinax copper cables (SFP-H10GB-ACU7M and SFP-H10GB-ACU10M) AOC cables: SFP-10G-AOC1M, SFP-10G-AOC2M, SFP-10G-AOC3M, SFP-10G-AOC5M, SFP-10G-AOC7M, and SFP-10G-AOC10M AOC breakout cables: QSFP-4X10G-AOC1M, QSFP-4X10G-AOC2M, QSFP-4X10G-AOC3M, QSFP-4X10G-AOC5M, QSFP-4X10G-AOC7M, and QSFP-4X10G-AOC10M Copper breakout cables: QSFP-4SFP10G-CU1M, QSFP-4SFP10G-CU3M, QSFP-4SFP10G-CU5M, QSFP-4x10G-AC7M, and QSFP-4x10G-AC10M Distance between Cisco Nexus 2000 Series Fabric Extender and Cisco Nexus 5000 or 6000 Series Switch: Up to 10 km (300m for FCoE traffic)
<b>Fabric speed</b>	80 Gbps in each direction (160-Gbps full duplex)
<b>Oversubscription</b>	4:1

<b>Performance</b>	Hardware forwarding at 800Gbps or 595 mpps
<b>FCoE</b>	FCoE supported
<b>Cisco parent switch</b>	Cisco Nexus 5000 Series Cisco Nexus 6000 Series Cisco Nexus 7000 Series Cisco Nexus 9000 Series
<b>Minimum software</b>	Cisco NX-OS Software Release 4.2 (Cisco Nexus 5000 Series) Cisco Nexus 6000 Series running Cisco NX-OS Software Release 6.0 and later Cisco NX-OS Software Release 5.2 (Cisco Nexus 7000 Series) Cisco NX-OS Software Release 6.1 (Cisco Nexus 9000 Series)
<b>Dimensions (H x W x D)</b>	1.72 x 17.3 x 17.7 in. (4.37 x 43.94 x 44.96 cm)
<b>Weight</b>	18.3 lb (8.3 kg)
<b>Environment</b>	Operating temperature: 32 to 104°F (0 to 40°C) Nonoperating temperature: -4 to 158°F (-20 to 70°C) Humidity: 5 to 95 percent (noncondensing) Altitude: 0 to 10,000 ft (0 to 3000m)
<b>Power supply</b>	N2200-PAC-400W, N2200-PAC-400W-B, N2200-PDC-400W, and N2200-PDC-350W-B
<b>Fan tray</b>	N2K-C2232-FAN and N2K-C2232-FAN-B
<b>Typical input operating power</b>	210W (maximum 270W)
<b>Input current</b>	2.5A (typical); 4.1A (maximum) Note: Input current listed for 110V; divide by 2 for 220V Supply will surge on AC power-up for a fraction of a second beyond this rating
<b>Output current</b>	20A (typical); 33A (maximum)
<b>Heat dissipation</b>	806 BTU/hour (typical); 1330 BTU/hour (maximum)
<b>Regulatory compliance</b>	Products should comply with CE Markings according to directives 2004/108/EC and 2006/95/EC.
<b>Safety</b>	UL 60950-1 CAN/CSA-C22.2 No. 60950-1EN 60950-1 IEC 60950-1AS/NZS 60950-1GB4943
<b>EMC: Emissions</b>	47CFR Part 15 (CFR 47) Class A AS/NZS CISPR22 Class A CISPR22 Class A EN55022 Class A ICES003 Class A VCCI Class A EN61000-3-2 EN61000-3-3 KN22 Class A CNS13438 Class A

<b>EMC: Immunity</b>	EN50082-1 EN61000-6-1 EN55024 CISPR24 EN300386 KN 61000-4 series
<b>RoHS</b>	The Cisco Nexus 2148T is RoHS-5 compliant, and the Cisco Nexus 2224T, 2248TP, 2232PP, 2248PQ, 2232TM, and 2232TM-E are RoHS-6 compliant.
<b>Network Equipment Building Standards (NEBS)</b>	The Cisco Nexus 2248TP, 2248TP-E, and 2232PP meet NEBS level-3 standards (hardware revision 3).
<b>Layer 2 features</b>	Layer 2 VLAN trunks IEEE 802.1Q VLAN encapsulation Cisco EtherChannel technology on uplinks PortChannel on server ports on Cisco Nexus 2200 platforms Advanced PortChannel hashing Jumbo frames on all ports (up to 9216 bytes) Pause frames (Priority Flow Control [PFC] and IEEE 802.3x) Private VLANs (promiscuous only on uplinks) Local multicast replication on Cisco Nexus 2200 platform (8000 entries) Autonegotiation to 1000BASE-T; full duplex on host interfaces
<b>Enhanced Ethernet</b>	DCB (Cisco Nexus 2232PP)
<b>Quality of service (QoS)</b>	Layer 2 IEEE 802.1p (class of service [CoS]) 8 hardware queues per port (Cisco Nexus 2200 platforms), or 4 hardware queues per port (Cisco Nexus 2148T) Per-port QoS configuration Local policing on Cisco Nexus 2200 platform (64 policers) CoS trust Configurable tail-drop threshold on Cisco Nexus 2200 platforms Egress strict-priority queuing Egress port-based scheduling: Weighted Round Robin (WRR)
<b>High availability</b>	Hot-swappable field-replaceable power supplies and fan modules 1:1 power redundancy Uplink traffic management through Cisco EtherChannel hashing or static port pinning vPCs for dual-homed active-active connectivity across two Cisco Nexus 5000 or 6000 Series Switches vPCs for dual-homed straight-through NIC connectivity across two Cisco Nexus 2000 Series Fabric Extenders ISSU
<b>Security</b>	Local classification (256 access control list [ACL] entries)
<b>Management</b>	Fabric extender management using in-band management Locator and beacon LEDs on front and back of chassis (locator beacons on the front and rear of the chassis help reduce errors when the equipment is serviced) Per-port locator and beacon LEDs Syslog Simple Network Management Protocol Versions 1, 2, and 3 (SNMP v1, v2, and v3) Enhanced SNMP MIB support XML (NETCONF) support Remote Monitoring (RMON) Cisco Discovery Protocol Versions 1 and 2 Cisco Switched Port Analyzer (SPAN) source on server ports Power-on self-test (POST) Cisco Generic Online Diagnostics (GOLD): Ethernet Comprehensive bootup diagnostic tests CiscoWorks Cisco Data Center Network Manager (DCNM); the Cisco Nexus 2000 Series is managed through the parent Cisco Nexus switch using DCNM and standard SNMP, XML interface, and command-line interface (CLI)

<b>Configuration MIBs</b>	ENTITY-MIB IF-MIB FABRIC-EXTENDER MIB CISCO-ENTITY-EXT-MIB CISCO-ENTITY-FRU-CONTROL-MIB CISCO-ENTITY-SENSOR-MIB CISCO-ETHERNET-FABRIC-EXTENDER-MIB
<b>Monitoring MIBs</b>	RMON-MIB
<b>Industry standards</b>	IEEE 802.1p: CoS prioritization IEEE 802.1Q: VLAN tagging IEEE 802.3: Ethernet IEEE 802.3ae: 10 Gigabit Ethernet SFF 8431 SFP+ support IEEE 802.3u 100BASE-TX specification IEEE 802.3ab 1000BASE-T specification IEEE 802.3an 10GBASE-T 10GBASE-SR 10GBASE-LR RMON SFF-8461

## Download Resource

---

### Support and Resources

 [Cisco Nexus 2000 Fabric Extenders Datasheet](#)

### Transition Guide

 [Select and Upgrade Cisco Data Center Switch](#)

## Want to Buy

---

[Order Now](#)

[Get a Quote](#)

## Why Router-switch.com

---

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

## Contact Us

---

- Tel: +1-626-239-8066 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: [sales@router-switch.com](mailto:sales@router-switch.com)